



Insulated Structures

Efficiency At Work

YUKON ISLAND FREEZER – SELF CONTAINED



Standard Specifications	
• Self-Contained	• Valves (Brass Thermostatic)
• Sliding Tops Glass	• Shaded Pole Fan
• LED Lights (either single/back to back)	• Electric Display
• 2 x Probes (Air Off and Defrost)	

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions




Insulated Structures
Efficiency At Work



Insulated Structures

Efficiency At Work

YUKON ISLAND FREEZER – SELF CONTAINED

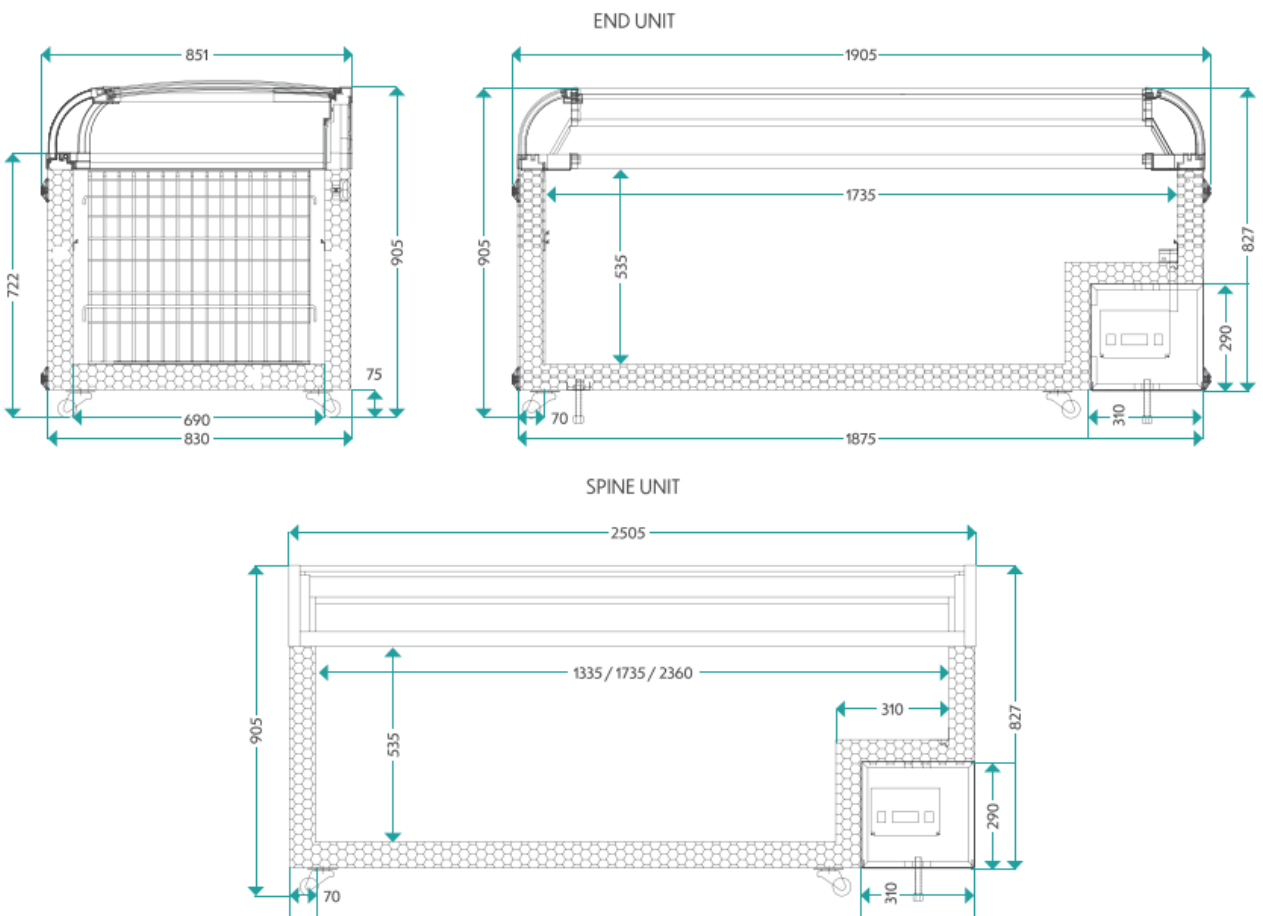

Factory Model	1.950m	2.0m	2.5m
Gross Capacity (L)	850	900	1100
Net Capacity (L)	650	780	960
Total Display area	1.06	1.2	1.69
Electrical Consumption	6.76KW/H	7.48KW/H	10.01KW/H
Climate / Temp Glass	4/L1	4/L1	4/L1
Refrigerant	R290	R290	R290
Weight	130/155	133/160	183/214
Loading Qty (40" HC)	26	24	18

Physical Properties			Electrical Specification	Refrigeration Requirements	
Length (mm)	Width (mm)	Height (mm)	Power Supply	Operating Conditions	Temperature Class
1905	845	922	220V – 50Hz	25 °C/60% RH	L1 (≤ -15 °C)
2505	845	922	220V – 50Hz	25 °C/60% RH	L1 (≤ -15 °C)

Specifications subject to change without notice. Designed for optimal performance in store environments where the temperature and humidity do not exceed 25 °C and 60%RH

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions

